

DATA SHEET - HL2024 Connect

Pressure independent flow controller. Optimal and instant control of (shower) mixers.



Figure number: 1120



Product overview

Mixer optimisation

The HL2024 Connect provides a constant flow, significantly reduces temperature fluctuations and creates optimal user comfort. The HL2024 Connect does that by largely eliminating the influence of pressure fluctuations into thermostatic and non-thermostatic (shower) mixers.

Certified constant flow


HL2024 products are pressure independent and as such provide a constant flow as certified by Kiwa, Netherlands (BRL-K635). The products meet the requirements for Kiwa Water Mark and primary European drinking water standards. All HL2024 products contain one or more integrated HL2024 Flow Controller(s). HL2024 is uniquely certified for pressure independence and long term operation and is patented in 29 countries worldwide.

Application

At thermostatic and non-thermostatic (shower) mixers.

Key properties

- Optimal water temperature stability
- Optimal flow control as a result of constant flow
- Definition of peak volume demand per mixer
- Water- and energy savings
- System stabilisation
- System pressure loss reduction

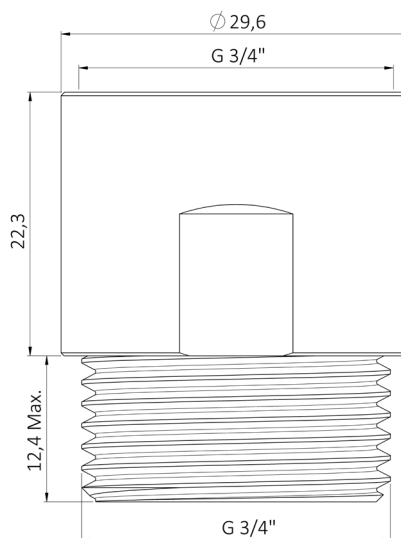

Top left: HL2024 Connect

Bottom right: HL2024 Connect - dimensions

Specifications


Mounting: at mixer inlets (hot & cold)
Connection inlet: G 3/4" (BSPP) female
Connection outlet: G 3/4" (BSPP) male
Built-in length: 22,3 mm (visible part after installation)
Width: 29,6 mm
Weight: 63 g
Housing material: brass (4MS)
Finish outside: chrome plated
Finish water contact area: n/a
Operating temperature: max. 90 °C *

Flow rate versions

5,0 l/min (150-1.000 kPa/dyn)
7,8 l/min (200-1.000 kPa/dyn)

Constant flow: pressure independent

Flow deviation within mentioned dynamic pressure range: max. 2%. **
The graph shows the constant flow performance of HL2024 products.

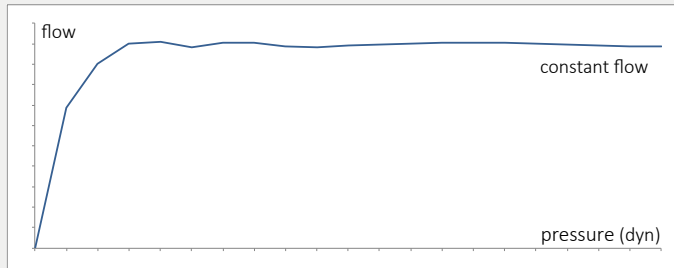

* In case of permanent or semi-permanent use at 500 kPa/dyn or more combined with 60 °C or more, please contact us at info@hl2024.com.

** Different types of mixers have different counter-pressures. This might somewhat influence the flow rate.

Disclaimer: HGP International aim to provide correct and up to date information at all times. No rights can be derived from information provided in this document. HGP International reject liability for any possible omissions and (consequences of) use of (accidentally) incorrect information in this document. HGP International reserve the right to make changes.