

# DATA SHEET - HL2024 Tap M22

Pressure independent flow controller. Ensures comfortable tap use and savings.



Top left: HL2024 Tap M22

Bottom right: HL2024 Tap M22 - dimensions (in mm)

## Specifications

Mounting: onto (mixer) tap, replacing existing aerator  
Connection inlet: M22  
Connection outlet: n/a  
Length: 35,0 mm  
Diameter: 23,2 mm  
Weight: 29 g  
Housing material: brass (4MS)  
Finish outside: chrome plated  
Finish water contact area: n/a  
Max. particle size: 400 µm  
Max. operating temperature: 90 °C

### Flow rate versions


5,0 l/min (150-1.000 kPa/dyn)

7,8 l/min (200-1.000 kPa/dyn)

### Constant flow: pressure independent

Flow deviation within mentioned dynamic pressure range: max. 2%.

The graph shows the constant flow performance of HL2024 products.

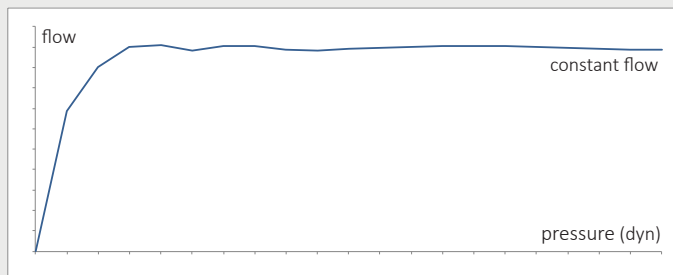

## Figure number: 1130

### Product overview

#### Comfortable tap use and savings

The HL2024 Tap M22 (aerator) optimizes any standard tap by delivering a constant flow. As such it prevents the unnecessary waste of water while at the same time optimising user comfort.

#### Certified constant flow

HL2024 products are pressure independent and as such provide a constant flow as certified by Kiwa, Netherlands (BRL-K635). The products meet the requirements for Kiwa Water Mark and primary European drinking water standards. All HL2024 products contain one or more integrated HL2024 Flow Controller(s). HL2024 is uniquely certified for pressure independence and long term operation and is patented in 29 countries worldwide.

#### Application

At (mixer) tap.

#### Key properties

- Soft water beam
- Optimal flow control as a result of constant flow
- Definition of peak volume demand per (mixer) tap
- Water- and energy savings
- System stabilisation
- System pressure loss reduction

